

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
16 May 2002 (16.05.2002)

PCT

(10) International Publication Number  
**WO 02/38026 A1**

(51) International Patent Classification<sup>7</sup>: **A47L 9/24**

(21) International Application Number: PCT/EP01/12396

(22) International Filing Date: 23 October 2001 (23.10.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
MI2000U 000626 7 November 2000 (07.11.2000) IT

(71) Applicant (for all designated States except US): **OMEC S.P.A** [IT/IT]; Via E. Mattei, 20, I-21055 Gorla Minore (IT).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **CANALE, Giuseppe** [IT/IT]; Via Vallazza, 31, I-21055 Gorla Minore (IT).

(74) Agents: **MARCHI, Massimo et al.**; Via Pirelli, 19, I-20124 Milano (IT).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **TELESCOPIC EXTENSION FOR AN ELECTRIC HOUSEHOLD APPLIANCE**

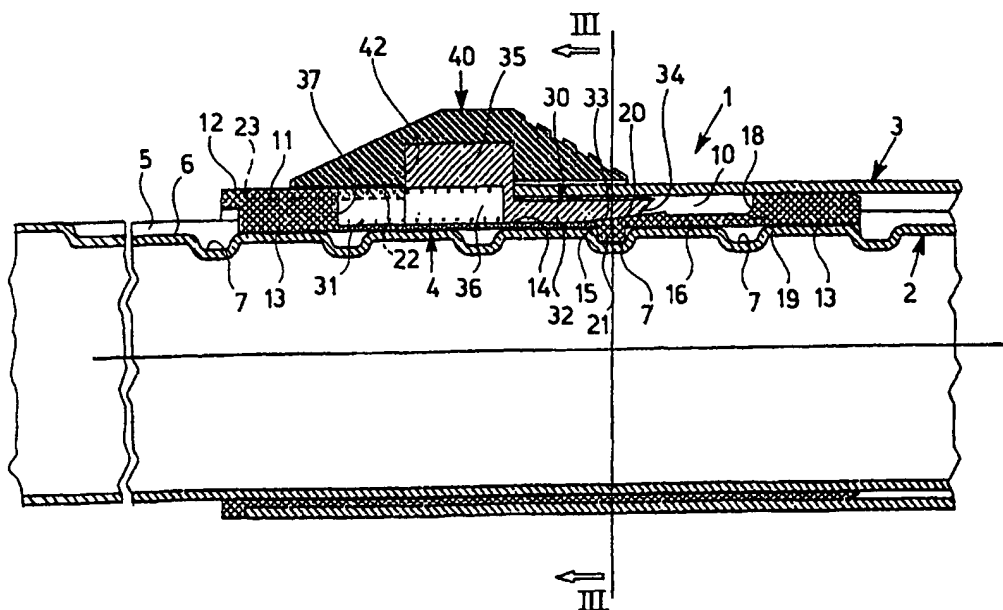

(57) Abstract: A telescopic extension (1) comprises an inner tube (2), an outer tube (3) and a sleeve (4) in which a constraining element (21) and a thrust slider (30) are movably supported; the constraining element (21) is capable of making integral the inner tube (2) and the outer tube (3) and the thrust slider (30) is connected to an actuating element (40) and is engaged with the constraining element (21) under the action of a spring (31); the constraining element (21) consists of a projection of an elastic tongue (16) having one end (19) formed as one piece with the sleeve (4). (Fig.1)

Best Available Copy

Best Available Copy

WO 02/38026 A1

"Telescopic extension for an electric household appliance"

\* \* \* \* \*

The present invention relates to a telescopic extension for an electric household appliance.

5        EP-B1-0 520 534 discloses a telescopic extension for a vacuum cleaner, comprising an inner tube and an outer tube sealingly slidable one inside the other, a sleeve, a means for constraining the inner tube and outer tube, a thrust slider and an actuating pushbutton.

10        The inner tube is provided with a row of recesses having a predefined shape and the outer tube is provided with an end tubular portion with a flared shape which is formed as one piece therewith and inside which the sleeve is fastened.

15        The constraining means consists of a cylinder piece integral with a plate provided with a pin. By means of the pin and the plate, the cylinder piece is rotatably supported in a hollow seat of the sleeve. The seat has, formed in it, a slit by means of which the cylinder piece is able to engage with a recess of the inner tube and disengage from the recess .

20        In this telescopic extension, the thrust slider is operationally connected to the actuating pushbutton, is slidably supported inside the seat of the sleeve and is subject to the action of resilient means.

25        The resilient means cause the thrust slider to engage with the plate integral with the cylinder piece to force the latter into the recess of the inner tube and lock the inner tube inside the outer tube. As a result, the extension assumes a predefined length.

30        In order to adjust the length of the extension, the actuating pushbutton is pushed manually against the action of the resilient means so that the thrust slider is able to disengage from the plate and leave the cylinder piece free to come out of the recess of the inner tube, releasing the inner tube from the outer tube. By means of sliding of the

inner tube inside the outer tube, the extension assumes the desired length.

In order to assemble the extension, the sleeve is fitted onto the inner tube and the constraining means, the slider/pushbutton assembly and the resilient means are pre-mounted in the hollow seat of the sleeve.  
Then, the inner tube is mounted inside the outer tube and the sleeve is inserted into the end tubular portion, centred with respect thereto, passing the slider/pushbutton assembly through an end opening of the outer tube.

The object of the present invention is to improve the abovementioned extension, reducing the number of components and making assembly easier.

The present invention relates to a telescopic extension for an electric household appliance, comprising:

- a) an inner tube and an outer tube slidable one inside the other,
- b) a sleeve fastened to said outer tube,
- c) a constraining means capable of making integral said inner tube and said outer tube,
- d) a thrust slider which can be engaged with said constraining means under the action of resilient means, and
- e) actuating means operationally connected to said thrust slider,
- f) said inner tube being provided with a row of recesses having a predefined shape,
- g) said sleeve being arranged between said inner tube and said outer tube,
- h) said constraining means and said thrust slider being movably supported by said sleeve,
- i) said thrust slider acting on said constraining means under the action of said resilient means to force said constraining means into a recess of said inner tube and lock said inner tube with respect to said

outer tube,

j) said actuating means being capable of disengaging said thrust slider from said constraining means to leave said constraining means free to move radially and come out of said recess, releasing said inner  
5 tube from said outer tube and allowing said inner tube to slide with respect to said outer tube in order to adjust the length of said extension,

k) said constraining means having an appendix,  
characterized in that

l) said appendix consists of a resilient tongue having one end formed  
10 as one piece with said sleeve, said resilient tongue being radially movable with respect to said sleeve,

m) said constraining means consists of a projection on said resilient tongue, and

n) said thrust slider can be engaged with said resilient tongue to  
15 force said projection into a recess of said inner tube and thus lock said inner and outer tubes and can be disengaged from said resilient tongue to allow said projection to come out of said recess of said inner tube and thus release said inner and outer tubes.

Preferably, said sleeve has a longitudinal cavity able to house said  
20 thrust slider and said resilient means.

Advantageously, said longitudinal cavity has an opening inside which said resilient tongue is located, said end of said resilient tongue being formed as one piece with a wall of said longitudinal cavity.

Preferably, said sleeve has an internal longitudinal boss which is  
25 located underneath said longitudinal cavity and said inner tube has a longitudinal groove with which said internal longitudinal boss of said sleeve is coupled in order to centre said sleeve with respect to said inner tube.

Preferably, said longitudinal groove of said inner tube has a bottom  
30 wall in which said recesses are present.

Advantageously, said outer tube has a lateral opening which extends as far as one end thereof and said sleeve has an external longitudinal relief which engages with said lateral opening to couple said outer tube with said sleeve and centre said outer tube with respect to said sleeve.

5 Preferably, said sleeve is provided with a collar against which said end of said outer tube comes into contact, said collar and said external relief having a thickness substantially equal to that of said outer tube so that it remains flush with said collar and said external relief .

10 Advantageously, said thrust slider is provided with an upper head able to be inserted by means of pressure into a niche in said actuating means.

Preferably, said sleeve, said resilient tongue and said projection are made of plastic material.

15 Advantageously, said outer tube has a cross-section with a substantially constant diameter.

The telescopic projection according to the invention has the advantage that it is compact, low-cost and simple to assemble.

20 Characteristic features and advantages of the invention will now be illustrated with reference to an embodiment shown by way of a non-limiting example in the accompanying drawings, in which:

Fig. 1 is a partial, longitudinal sectional view of a telescopic extension for an electric household appliance according to the invention, in the locked condition;

25 Fig. 2 shows the extension according to Fig. 1 in the unlocked condition;

Fig. 3 is a cross-sectional view taken along the plane III-III in Fig. 1;

Fig. 4 is a partial top view, on a reduced scale, of the extension of Fig. 1;

30 Fig. 5 is a partial, perspective view of an outer tube, a sleeve and an inner tube of the extension of Fig. 1 in the disassembled condition;

Fig. 6 is a top view of the sleeve of the extension of Fig. 1;

Fig. 7 is a longitudinal sectional view of the sleeve of Fig. 6;

Fig. 8 is a cross-sectional view taken along the plane VIII-VIII in Fig. 7;

5 Fig. 9 is a bottom view of a pushbutton and a thrust slider of the extension of Fig. 1;

Fig. 10 is a longitudinal sectional view of the pushbutton and the thrust slider of Fig. 9;

10 Fig. 11 is a cross-sectional taken view along the plane XI-XI in Fig. 10;

Figs. 12 and 13 are respectively a right-hand side view and top view of the pushbutton and thrust slider of Fig. 9.

15 Figs. 1, 2 and 3 show a telescopic extension for an electric household appliance, such as a vacuum cleaner, numbered on the whole with 1. The extension 1 comprises an inner tube 2, an outer tube 3 and a sleeve 4 arranged between the inner tube and the outer tube.

The inner tube and outer tube 2 and 3 are sealingly slidable one inside the other. A sealing gasket arranged between inner tube and outer tube is not shown.

20 The inner tube 2 has a longitudinal groove 5, with a substantially parallelepiped shape, having a bottom wall 6 (Fig. 4) in which a row of recesses 7 with a partially cylindrical shape is formed.

25 The sleeve 4 has a longitudinal cavity 10 (Figs. 6-8), an external relief 11, a collar 12 and an internal boss 13 (Fig. 7). The external relief 11 has a substantially parallelepiped shape and is aligned with the cavity 10. The internal boss 13 has a substantially parallelepiped shape and a length nearly the same as that of the sleeve 4.

30 The cavity 10 has a bottom wall 14 in which an opening 15 is formed. A resilient tongue 16 integral with the sleeve 4 is located in the opening 15. The resilient tongue 16 projects from a wall 18 of the opening 15

and has one end 19 formed as one piece with the wall 18. The resilient tongue 16 has on the upper side an inclined ramp 20 and on the lower side a tooth-shaped projection 21. The resilient tongue 16 is movable radially with respect to the sleeve 4 and, during its centripetal radial movements, causes the projection 21 to penetrate into a recess 7 of the tube 2 (Fig. 1), whereas, during its centrifugal radial movements, it extracts the projection 21 from the recess 7 (Fig. 2). Therefore, the projection 21 forms a means for constraining the inner tube 2 and outer tube 3, the sleeve 4 being made integral with the outer tube 4, as will be illustrated further below, and the resilient tongue 16 forms an appendix of the projection 21.

The outer tube 3 has a lateral opening 22 which extends as far as one end 23 and engages with the external relief 11 of the sleeve 4 until the end 23 of the outer tube comes into contact against the collar 12 of the sleeve 4 (Fig. 4). Thus the outer tube is coupled with the sleeve 4 and is centred with respect thereto, remaining flush with the collar 12 and with the relief 11 because the latter have a thickness which is practically the same as that of the outer tube 3.

The outer tube 3 is fastened to the sleeve 4 by means of two indentations - not shown - which penetrate into two notches 24 on the sleeve 4 (Figs. 5 and 6). The indentations are formed at the moment of assembly by means of deformation of the wall of the tube 3.

The longitudinal cavity 10 of the sleeve 4 houses a thrust slider 30 and a helical spring 31.

The thrust slider 30 (Figs. 9-12) consists of a rectangular plate 32 having an inclined wall 33 able to remain in contact with the inclined ramp 20 of the tongue 16, and a tapered wall 34. A head 35 which is formed as one piece with the plate projects upwards from the plate 32. The head 35 and the plate 32 have a blind hole 36 in which the spring 31 is partially housed. The spring 31 reacts against a wall 37 of the

- 7 -

cavity 10 in the sleeve 4 and is mounted pre-stressed so that the inclined wall 33 of the slider 30 is normally in contact with the inclined ramp 20 of the resilient tongue 16 (Fig. 1) and pushes the projection 21 to penetrate into a recess 7 of the inner tube 2. In this way, the tubes 2 and 3 are rigidly joined together and form an extension 1 with a predefined length.

A pushbutton 40 (Figs. 9-13) is mounted on the head 35 of the thrust slider 30 (Figs. 9-13). The pushbutton 40 has a seat 41 provided with a niche 42 into which the head 35 is inserted with pressure. Thus pushbutton 40 and slider 30 are locked together by means of interference.

The thrust slider 30 and the pushbutton 40 may be formed as one piece.

The tubes 2 and 3 are made, for example, of painted aluminium or stainless-steel sheet metal, which is chrome-plated externally.

The sleeve 4 is made, for example, of a suitable plastic material. The thrust slider 30 and the pushbutton 40 are also made of a suitable plastic material.

The plate 32 of the slider 30 has an elongated and flattened form. It has a thickness practically equal to the depth of the cavity 10 in the sleeve 4. Thus the plate 32 remains embedded inside the cavity 10 and is flush with the external surface of the sleeve 4.

The extension 1 has transverse dimensions which are minimized. Its compact form is also due to the fact that the resilient tongue 16 is provided with the tooth-shaped projection 21 which engages with the indented, concave, recesses 7 of the inner tube 2. The increases in transverse dimensions of the inner tube, which would occur with a tongue which can be engaged with outward projecting protrusions of the inner tube, are thus avoided.

The extension 1, in addition to having a simple and compact design,



is also very resistant to stresses because the resilient tongue 16 has a stress resistance much greater than that of a tongue which can be engaged with protrusions projecting from the inner tube and which must have a curved end.

5        Another advantage of the extension 1 consists in the fact that the contact between the inclined wall 33 of the slider 30 and the inclined ramp 20 of the tongue 16 extends over a surface and any wear which may occur with use of the extension 1 is uniformly distributed over the entire surface. The presence of the spring 31 prevents the formation of  
10       play between the slider 30 and the tongue 16 and ensures correct contact also after prolonged use of the extension.

      In order to adjust the length of the extension 1, the pushbutton 40 is operated manually, displacing it from the position shown in Fig. 1 to the position shown in Fig. 2 so that the slider 30 separates from the  
15       resilient tongue 16 and leaves it free to be raised to extract the projection 21 from the recess 7 of the tube 2, inside which it is inserted.

      This allows sliding of the tube 2 inside the tube 3 until the desired length of the extension 1 is achieved.

20       Assembly of the telescopic extension 1 is performed by fitting the sleeve 4 onto the inner tube 2 so that its internal boss 13 is coupled with the longitudinal groove 5 of the inner tube. The slider 30 with the spring 31 is then mounted in the cavity 10 of the sleeve 4 in a position where its inclined wall 33 is in contact with the ramp 20 of the tongue 16 and pushes the projection 21 into a recess 7 of the inner tube 2.

25       At this point, the outer tube 3 is fitted onto the sleeve 4, coupling its lateral opening 22 with the external relief 11 until its end 23 is brought into contact against the collar 12 of the sleeve. In this position, the head 35 of the slider 30 projects outside the opening 22 and the pushbutton 401 may be press-fitted thereon. Therefore, the assembly of the  
30       extension 1 requires only a few simple and easy operations.

## CLAIMS

1. Telescopic extension for an electric household appliance, comprising:
- a) an inner tube (2) and an outer tube (3) slidable one inside the other,
  - 5       b) a sleeve (4) fastened to said outer tube (3),
  - c) a constraining means (21) capable of making integral said inner tube (2) and said outer tube (3),
  - d) a thrust slider (30) which can be engaged with said constraining means (21) under the action of resilient means (31), and
  - 10       e) actuating means (40) operationally connected to said thrust slider (30),
  - f) said inner tube (2) being provided with a row of recesses (7) having a predefined shape,
  - g) said sleeve (4) being arranged between said inner tube (2) and
  - 15       said outer tube (3),
  - h) said constraining means (21) and said thrust slider (30) being movably supported by said sleeve (4),
  - i) said thrust slider (30) acting on said constraining means (21) under the action of said resilient means (31) to force said constraining means
  - 20       (21) into a recess (7) of said inner tube (2) and lock said inner tube (2) with respect to said outer tube (3),
  - j) said actuating means (40) being capable of disengaging said thrust slider (30) from said constraining means (21) to leave said constraining means (21) free to move radially and come out of said recess (7),
  - 25       releasing said inner tube (2) from said outer tube (3) and allowing said inner tube (2) to slide with respect to said outer tube (3) in order to adjust the length of said extension,
  - k) said constraining means (21) having an appendix (16), characterized in that
  - 30       l) said appendix (16) consists of a resilient tongue having one end

(19) formed as one piece with said sleeve (4), said resilient tongue (16) being radially movable with respect to said sleeve (4),

m) said constraining means (21) consists of a projection on said resilient tongue (16), and

5        n) said thrust slider (30) can be engaged with said resilient tongue (16) to force said projection (21) into a recess (7) of said inner tube (2) and thus lock said inner and outer tubes (2, 3) and can be disengaged from said resilient tongue (16) to allow said projection (21) to come out of said recess (7) of said inner tube (2) and thus release said inner and  
10        outer tubes (2, 3).

2. Telescopic extension (1) according to Claim 1, characterized in that said sleeve (4) has a longitudinal cavity (10) able to house said thrust slider (30) and said resilient means (31).

3. Telescopic extension (1) according to Claims 1 and 2, characterized in  
15        that said longitudinal cavity (10) has an opening (15) inside which said resilient tongue (16) is located, said end (19) of said resilient tongue (16) being formed as one piece with a wall (18) of said longitudinal cavity (10).

4. Telescopic extension (1) according to Claims 1 and 2, characterized in  
20        that said sleeve (4) has an internal longitudinal boss (13) which is located underneath said longitudinal cavity (10) and said inner tube (2) has a longitudinal groove (5) with which said internal longitudinal boss (13) of said sleeve is coupled in order to centre said sleeve (4) with respect to said inner tube (2).

25        5. Telescopic extension (1) according to Claims 1 and 4, characterized in that said longitudinal groove (5) of said inner tube (2) has a bottom wall (6) in which said recesses (7) are present.

6. Telescopic extension (1) according to Claim 1, characterized in that  
30        said outer tube (3) has a lateral opening (22) which extends as far as one end (23) thereof and said sleeve (4) has an external longitudinal

relief (11) which engages with said lateral opening (22) to couple said outer tube (3) with said sleeve (4) and centre said outer tube (3) with respect to said sleeve (4).

- 5 7. Telescopic extension (1) according to Claim 6, characterized in that said sleeve (4) is provided with a collar (12) against which said end (23) of said outer tube (3) comes into contact, said collar (12) and said external relief (11) having a thickness substantially equal to that of said outer tube (3) so that it remains flush with said collar (12) and said external relief (11).
- 10 8. Telescopic extension (1) according to Claim 1, characterized in that said thrust slider (30) is provided with an upper head (35) able to be inserted by means of pressure into a niche (42) in said actuating means (40).
- 15 9. Telescopic extension (1) according to Claim 1, characterized in that said sleeve (4), said resilient tongue (16) and said projection (21) are made of plastic material.
10. Telescopic extension (1) according to Claim 1, characterized in that said outer tube (3) has a cross-section with a substantially constant diameter.

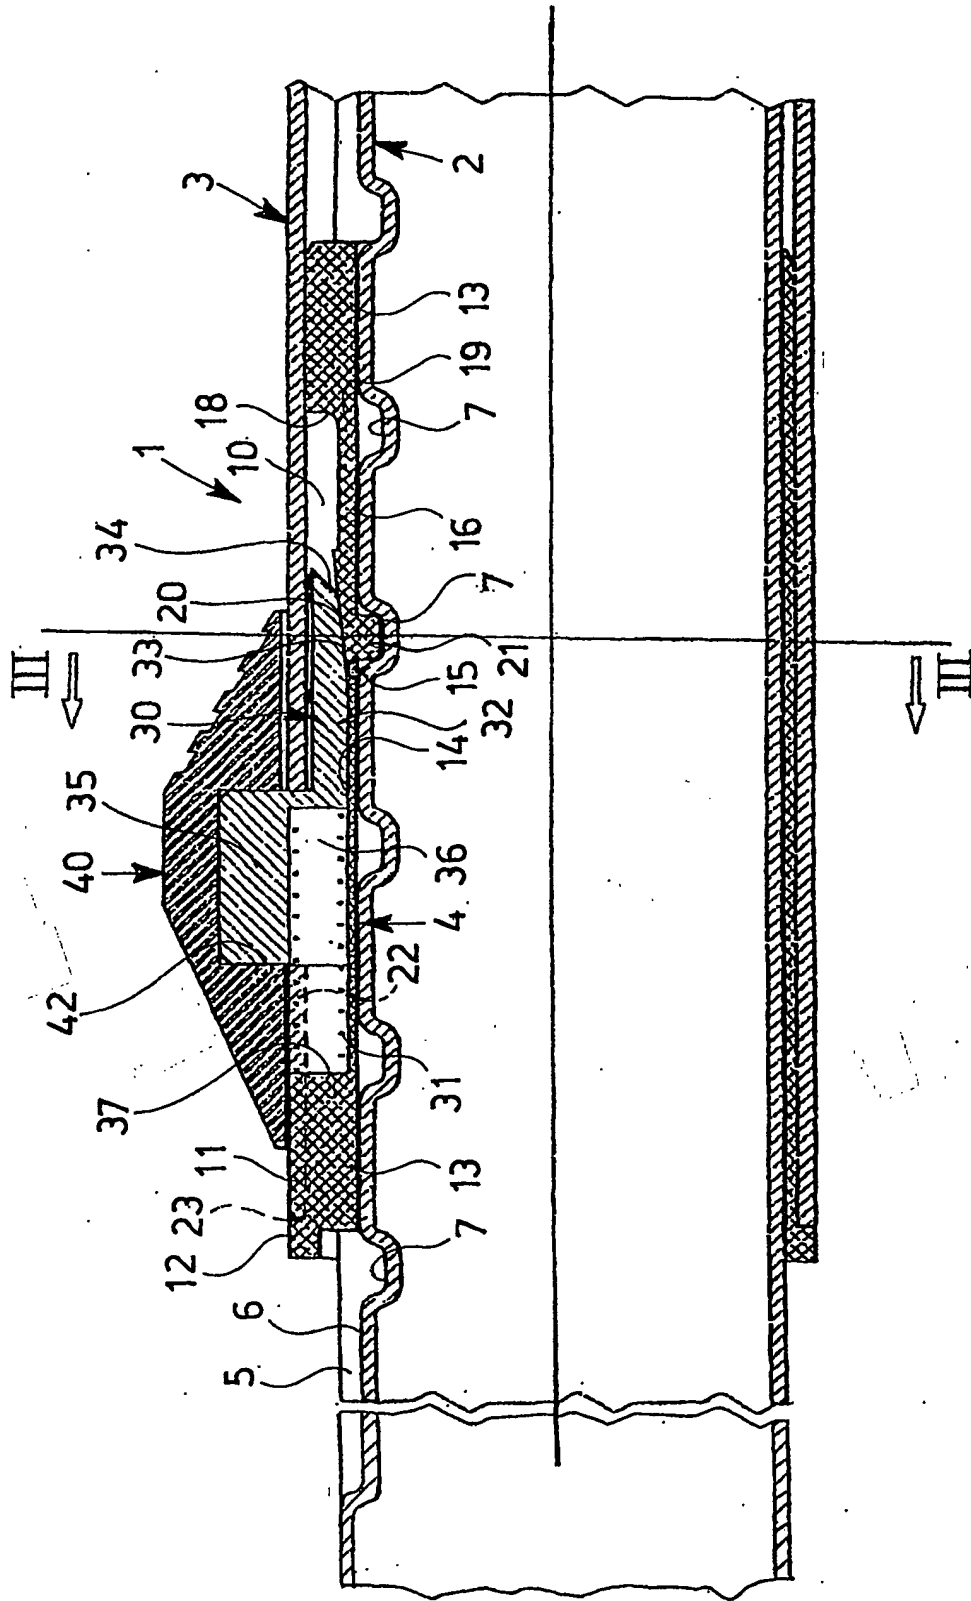


Fig. 1

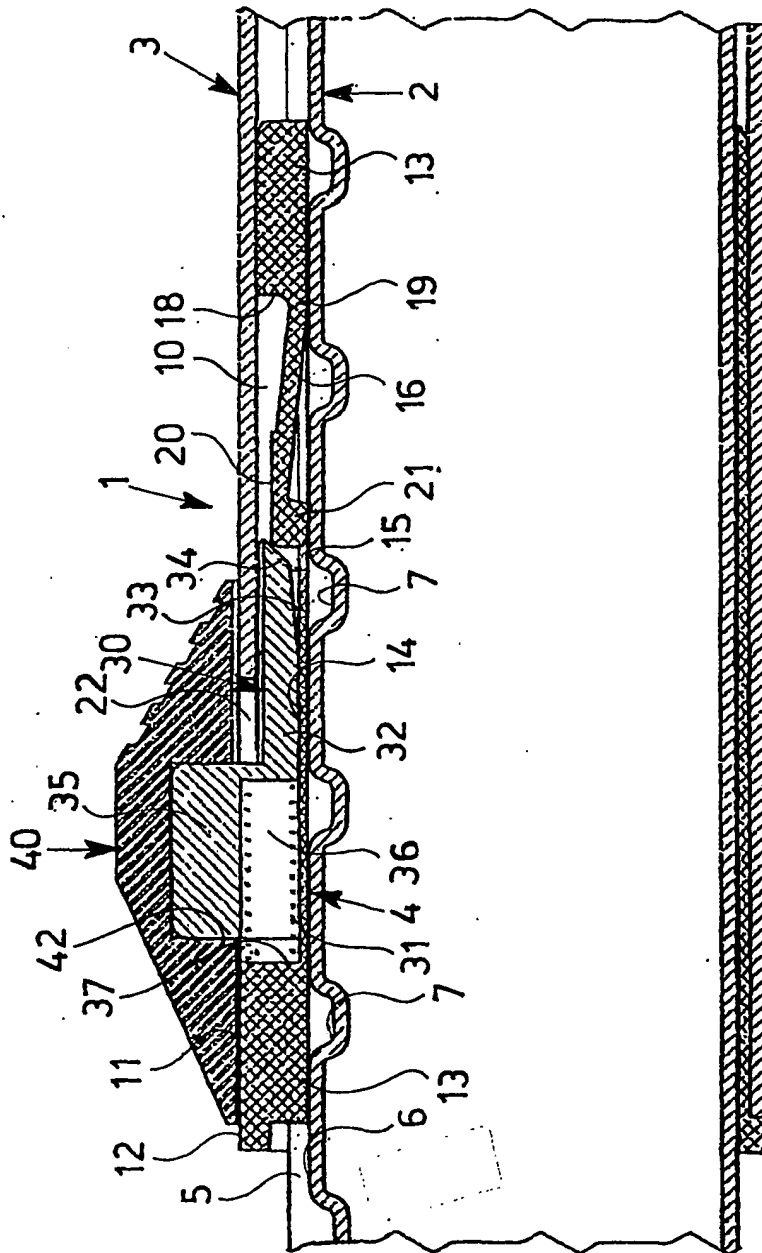


Fig. 2

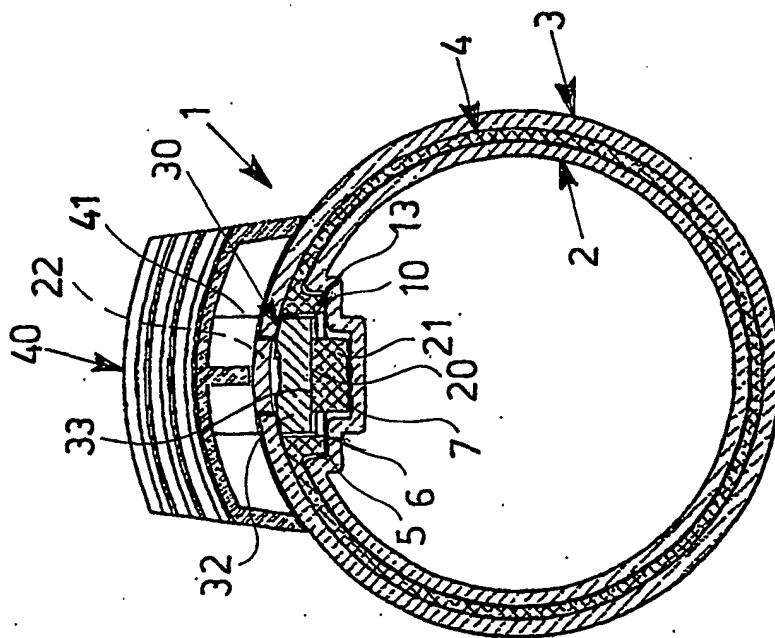


Fig. 3

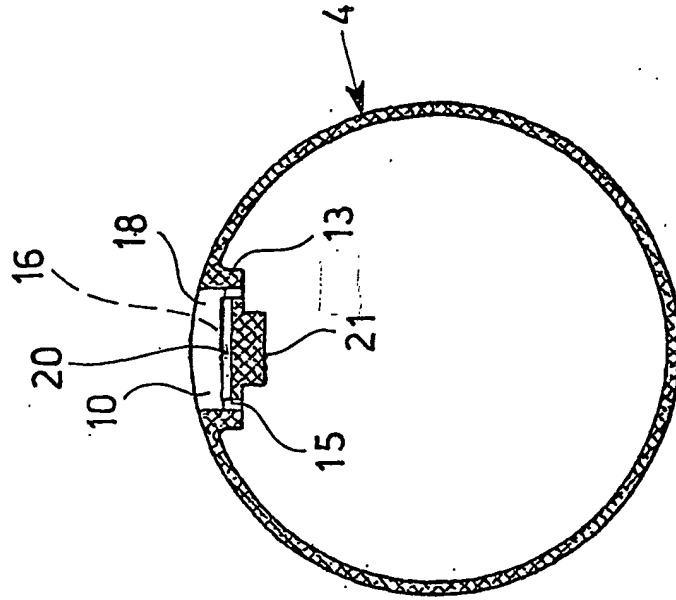


Fig. 8

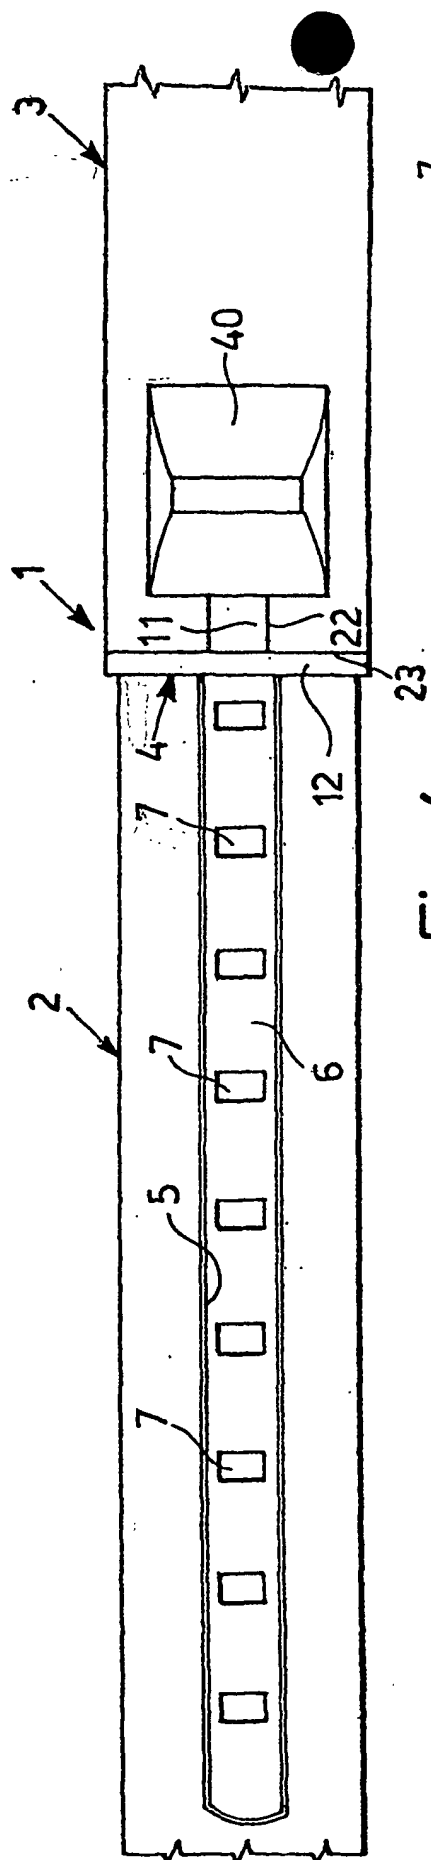


Fig. 4

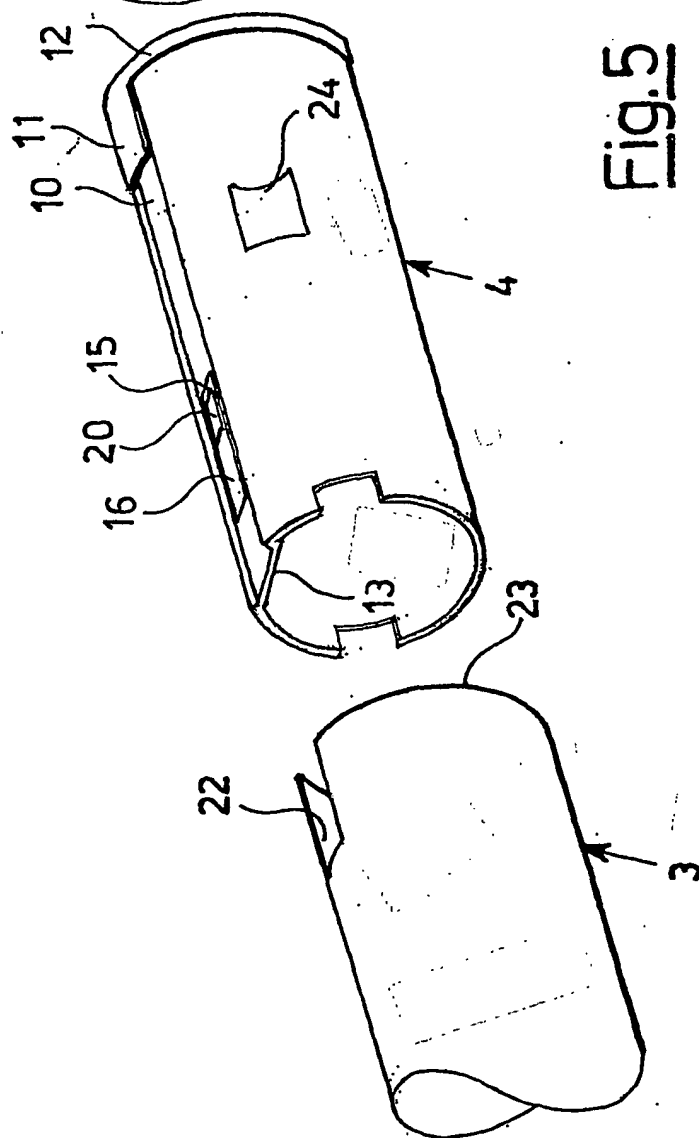
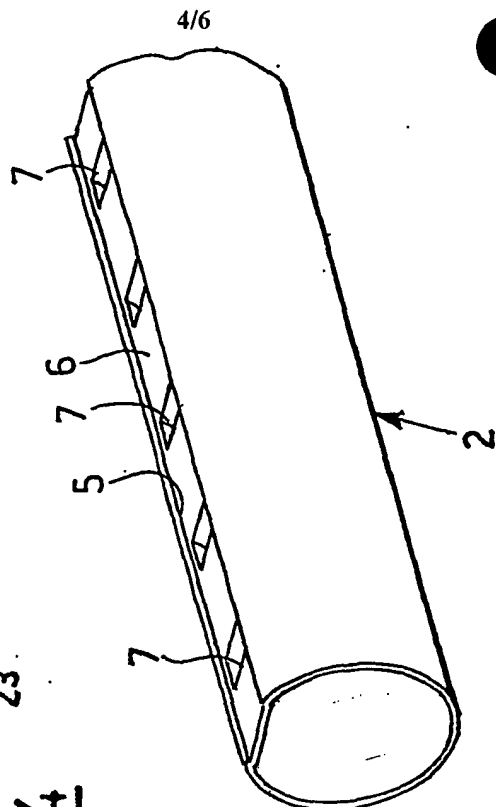
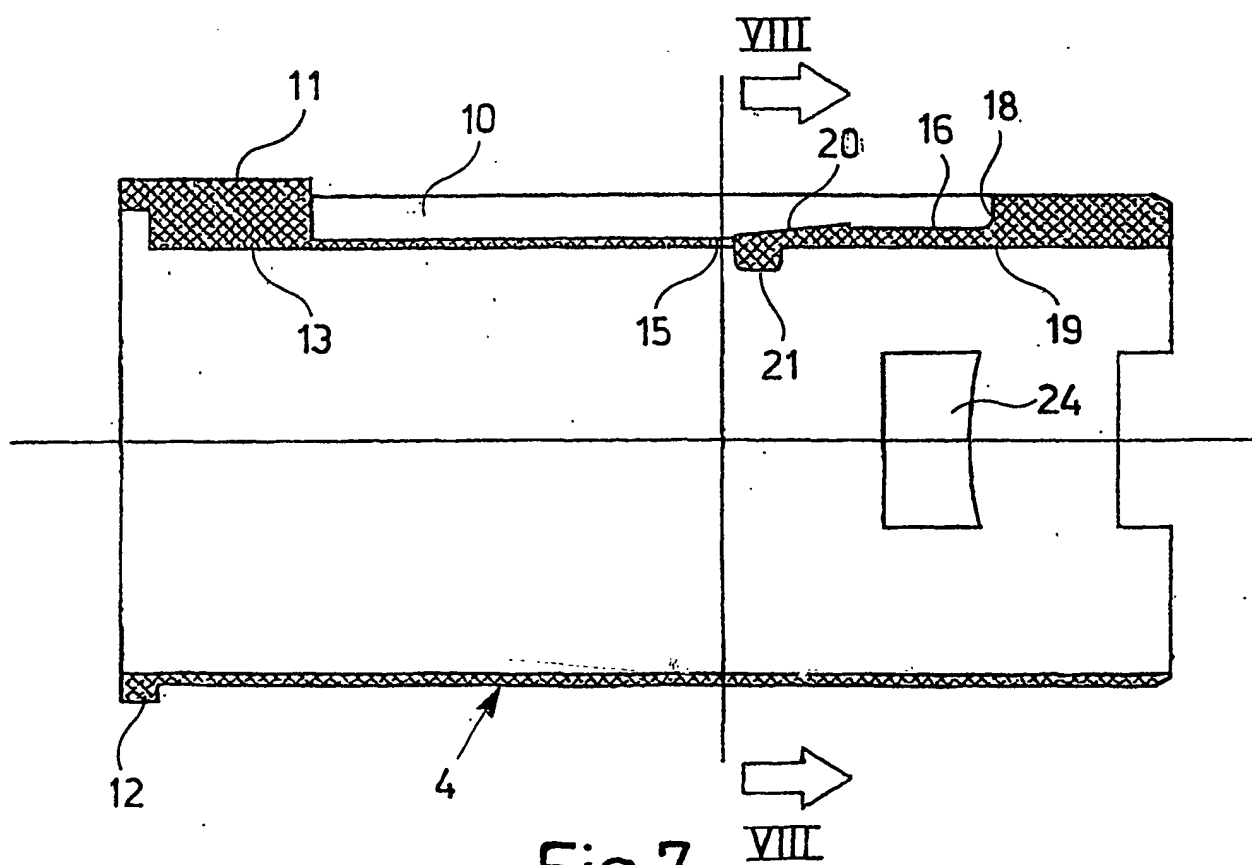
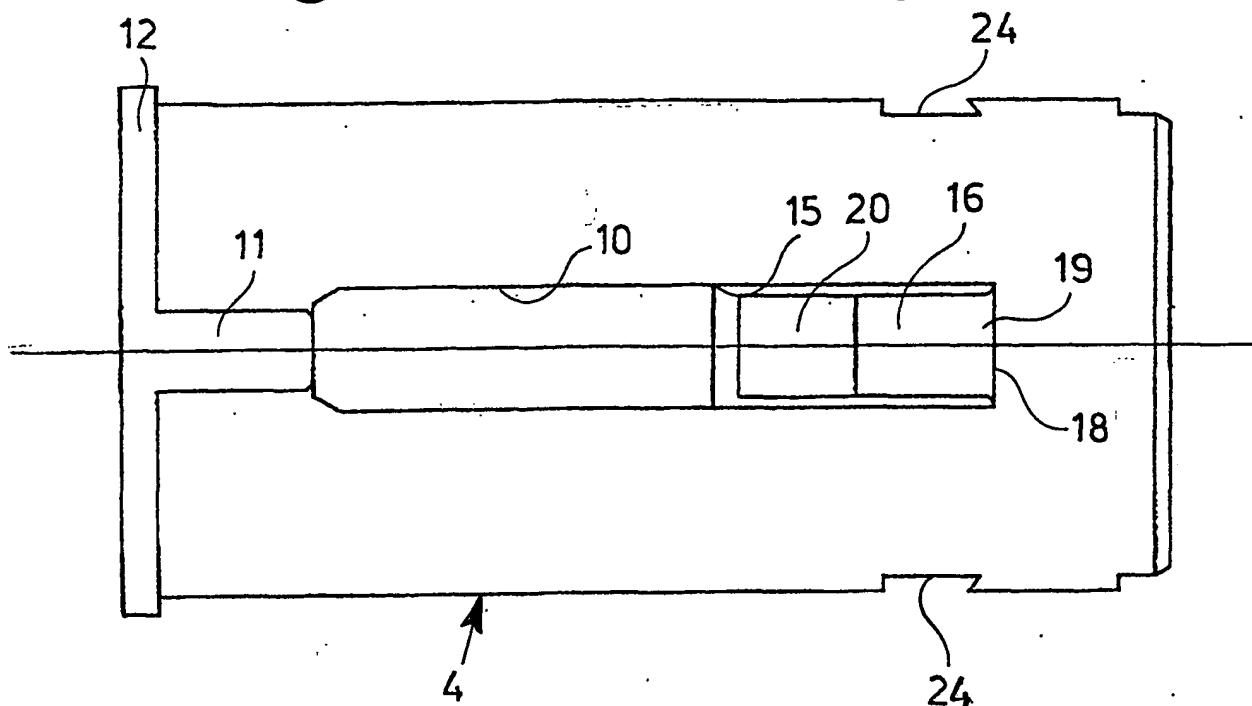


Fig. 5





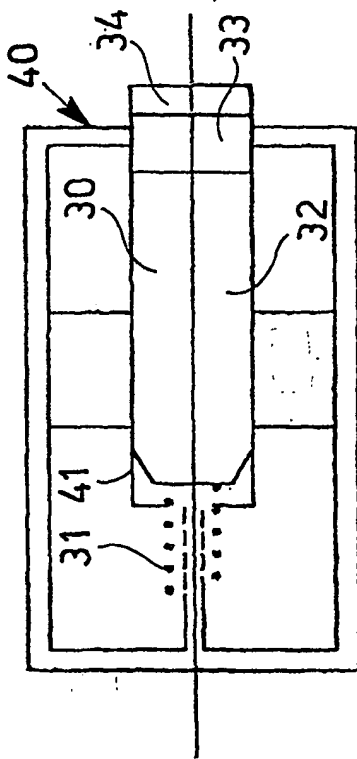


Fig. 9

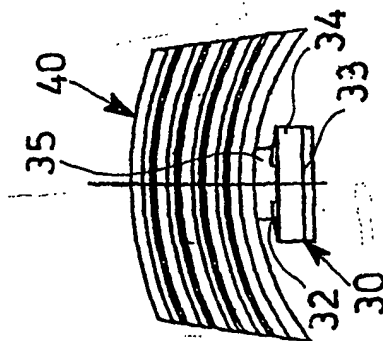


Fig. 12

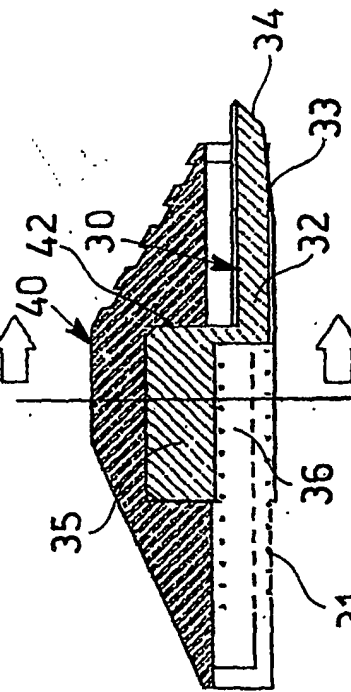


Fig. 10

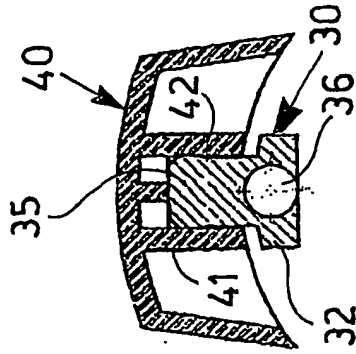


Fig. 11

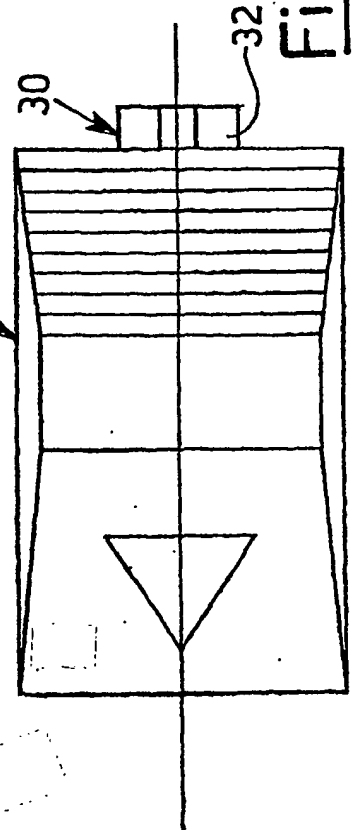


Fig. 13

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 A47L9/24

According to International Patent Classification (IPC) or to both national classification and IPC

### B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A47L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

### C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 1 033 103 A (FROH CARL GMBH) 6 September 2000 (2000-09-06) column 4, line 37 -column 7, line 40; figures 2-5,10 ---	1-10
Y	WO 98 56289 A (CANALE GIUSEPPE ;OMEC SPA (IT)) 17 December 1998 (1998-12-17) page 6, line 18 -page 11, line 6; figures 1,2 ---	1-10
P,A	EP 1 092 383 A (OMEC SPA) 18 April 2001 (2001-04-18) column 5, line 3 -column 7, line 4; figure 1 ---	1-10
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents :

- "A"** document defining the general state of the art which is not considered to be of particular relevance
- "E"** earlier document but published on or after the international filing date
- "L"** document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O"** document referring to an oral disclosure, use, exhibition or other means
- "P"** document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

11 February 2002

Date of mailing of the international search report

26/02/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Lodato, A

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 937 435 A (KWANG DONG PRECISION CO LTD ;LG ELECTRONICS INC (KR)) 25 August 1999 (1999-08-25) column 7, line 50 -column 9, line 4; figures 10A-10E -----	1-10

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1033103	A	06-09-2000	DE 10004443 A1	05-10-2000
			CN 1264568 A	30-08-2000
			DE 20001792 U1	21-12-2000
			EE 200000027 A	16-10-2000
			EP 1033103 A2	06-09-2000
			HU 0000746 A2	28-04-2001
			JP 2000308610 A	07-11-2000
			NO 20000821 A	23-08-2000
			PL 338498 A1	28-08-2000
			SK 2072000 A3	12-09-2000
WO 9856289	A	17-12-1998	IT MI971364 A1	10-12-1998
			AU 8437798 A	30-12-1998
			BG 103955 A	31-07-2000
			CN 1269704 T	11-10-2000
			DE 987976 T1	31-08-2000
			WO 9856289 A1	17-12-1998
			EP 0987976 A1	29-03-2000
			HU 0004182 A2	28-04-2001
			PL 339546 A1	18-12-2000
			TR 9902990 T2	21-09-2000
			ZA 9804652 A	28-01-1999
EP 1092383	A	18-04-2001	EP 1092383 A1	18-04-2001
			AU 6413400 A	12-04-2001
			CN 1291462 A	18-04-2001
			CZ 20003756 A3	12-09-2001
			JP 2001112679 A	24-04-2001
			PL 343063 A1	23-04-2001
EP 0937435	A	25-08-1999	EP 0937435 A2	25-08-1999

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**  
As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.